


REMOVING / REFITTING MAZDA MOTOR COG



①

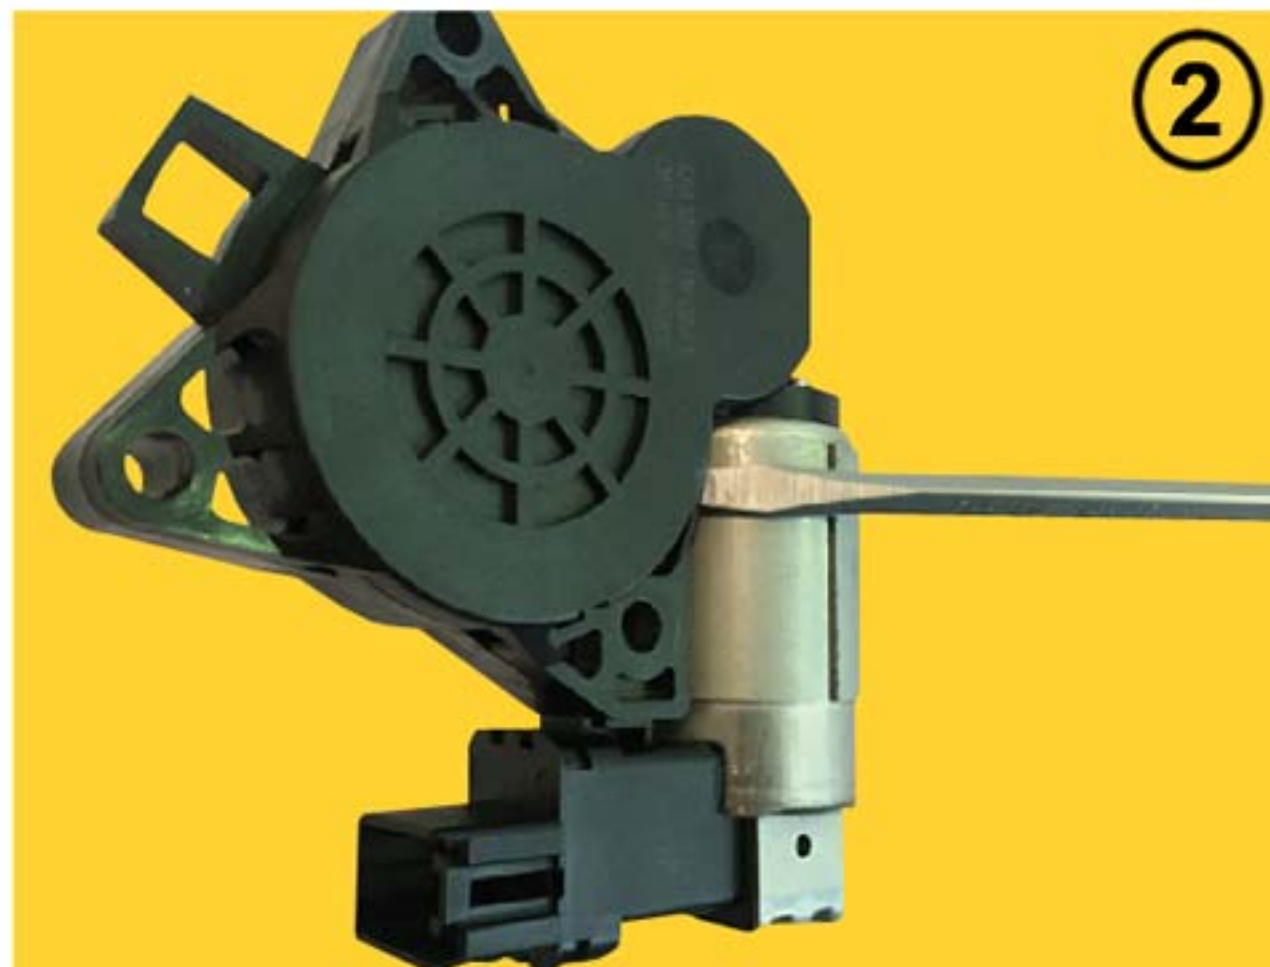


②

1. Locate the plastic joint (as pictured) and tap lightly to break the seam.

2. Place Mazda window motor as shown in image 2 and wedge motor cog cover open with a flat screw driver.




③

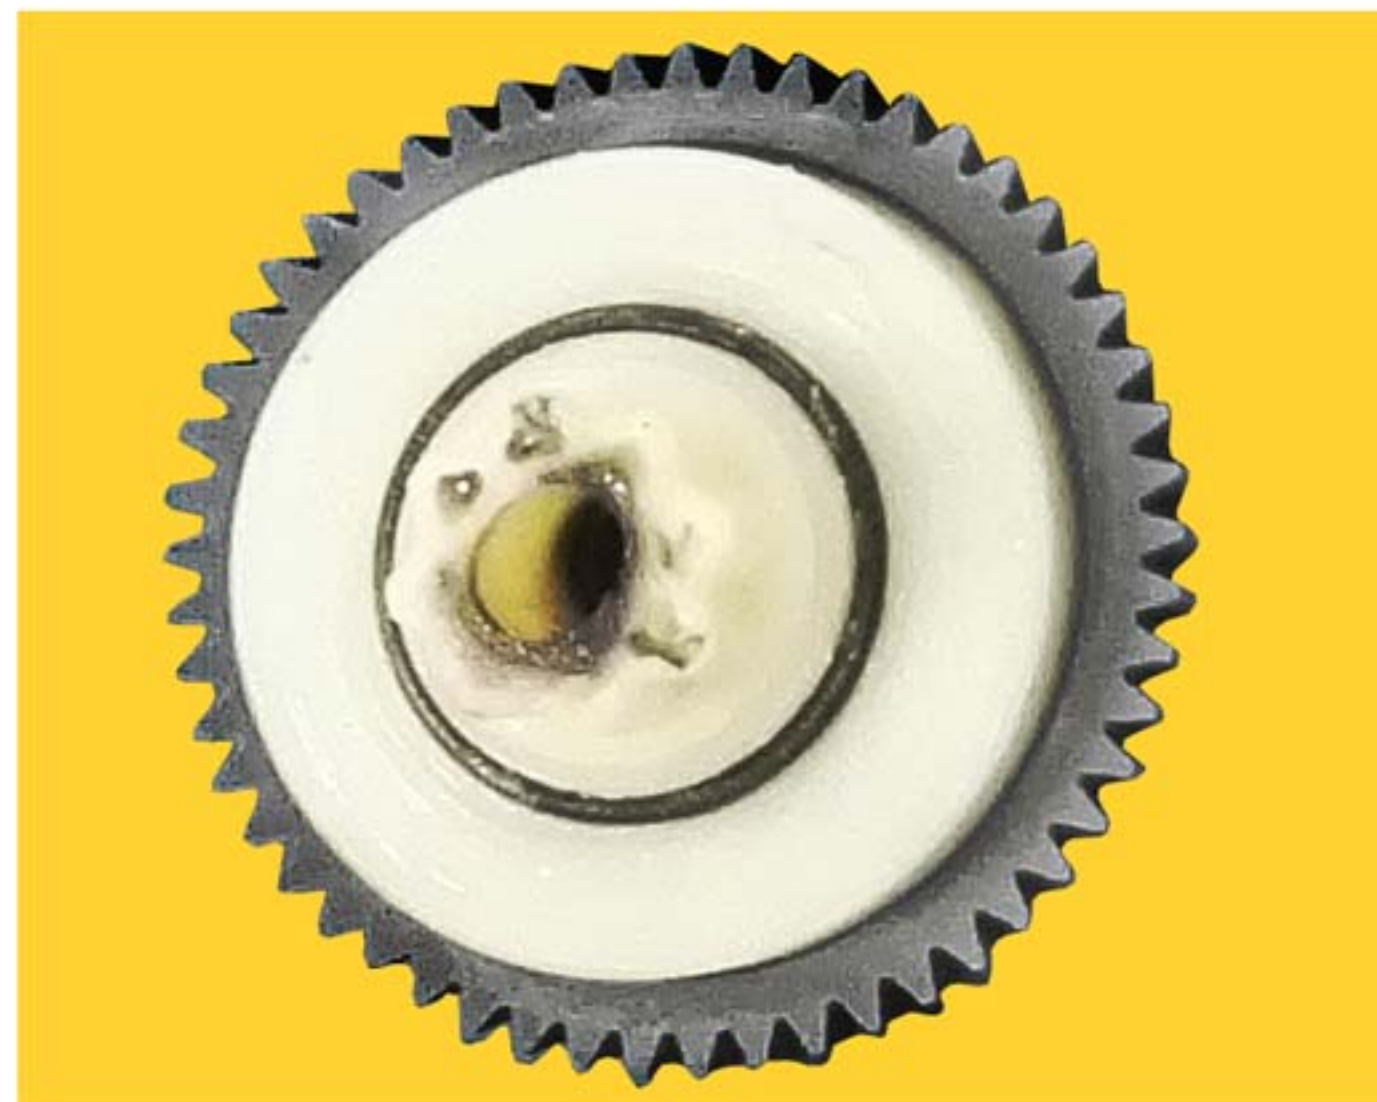

3. Once open, pull out the gears **A** & **B** and any broken teeth from the drive bases.

Remove drive spindle and rubber clutch from on top of gear **B**, and reassemble on top of our new Mazda gear **B**.

Lightly grease the Mazda gears **A** & **B** and refit back into the drive bases,

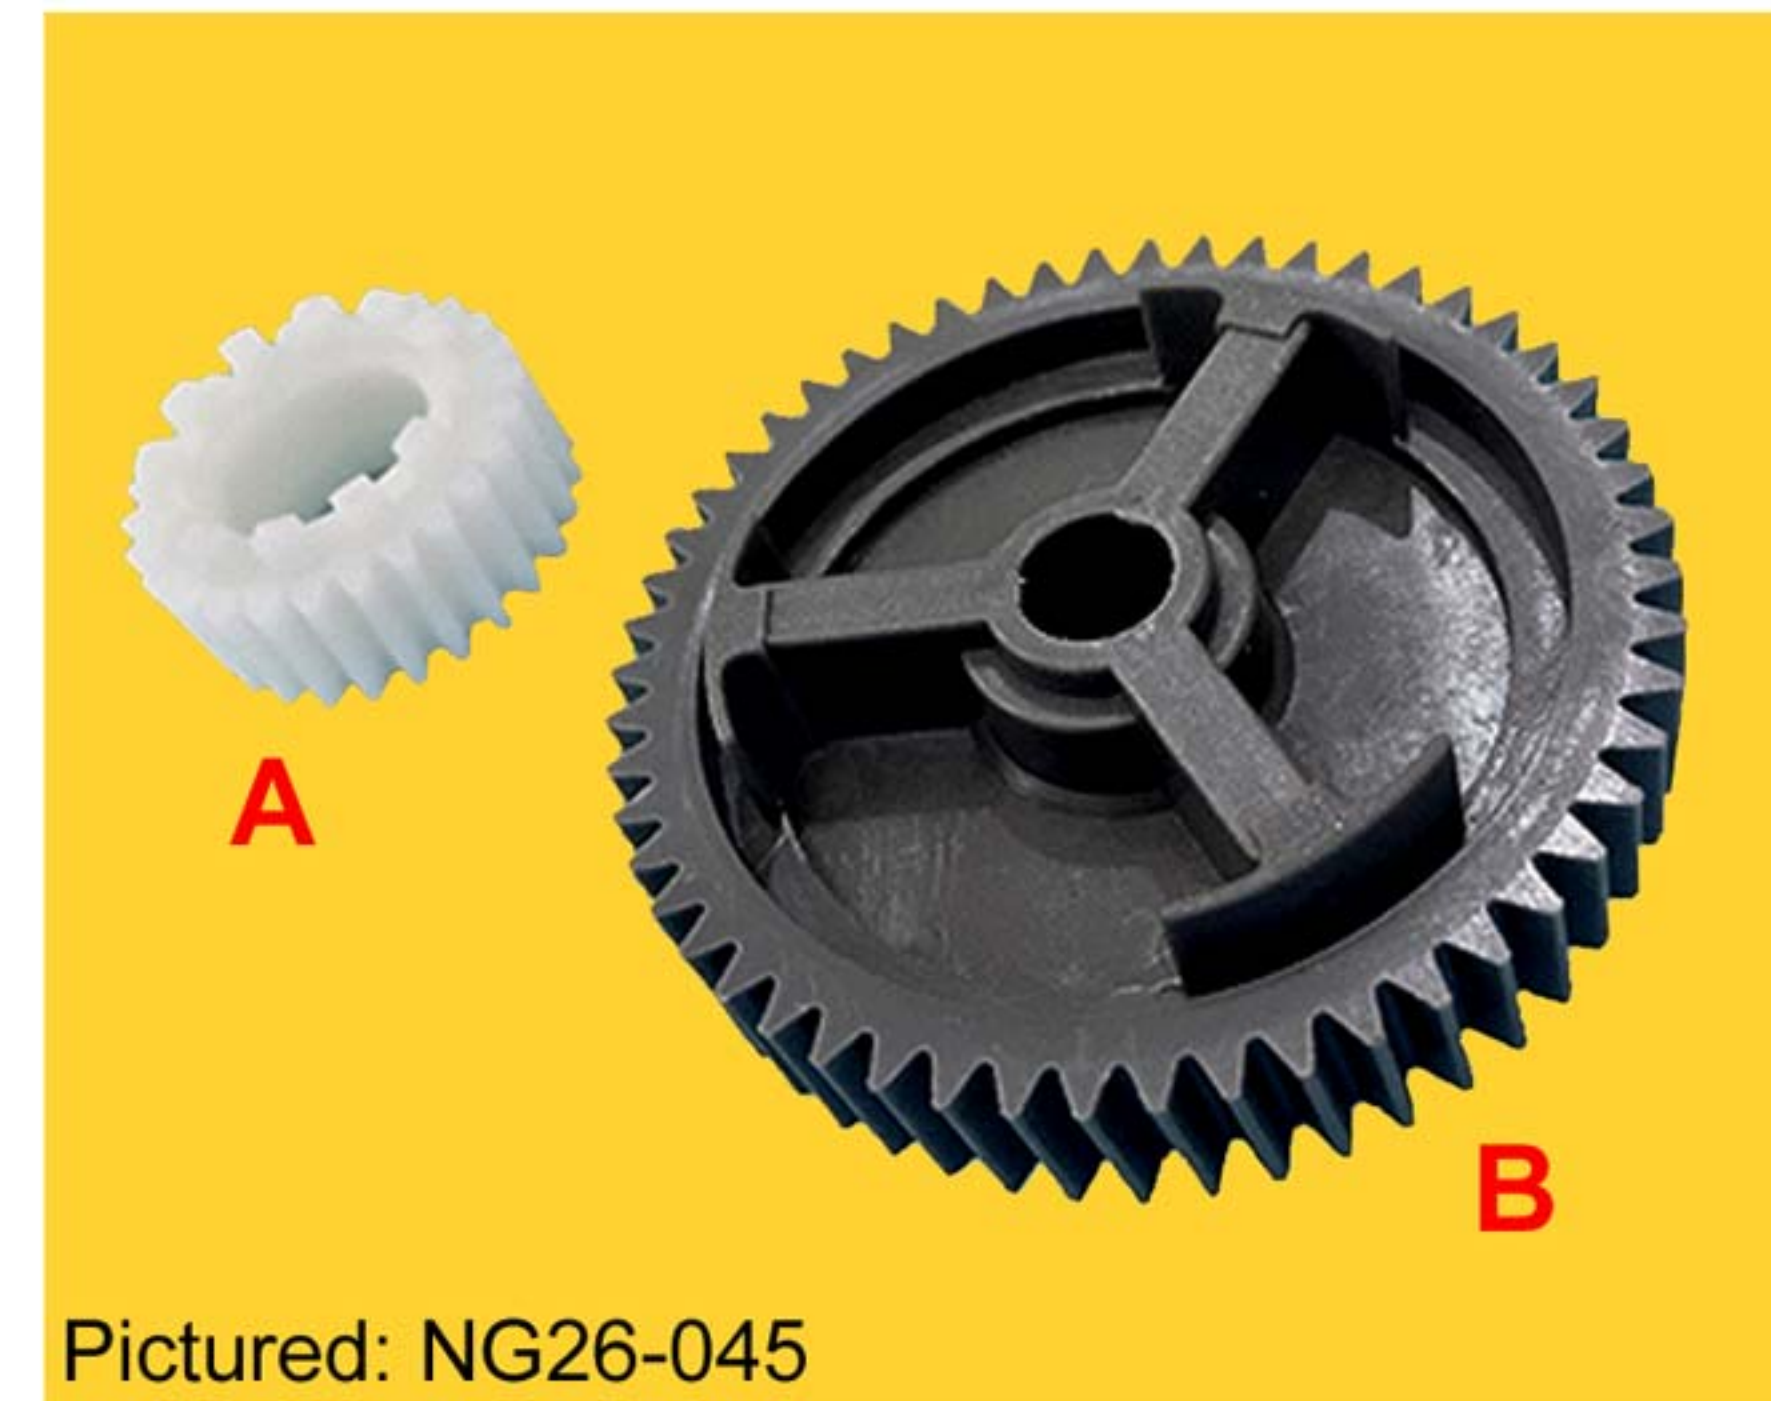

Pictured: NG26-045

Remanufactured Mazda Motor Cog fits: Mazda 2 (DY), 3 (BK), 6 (CG), RX8, CX7, CX9 (2006-2015).

Fits all doors.